


PNEUMATIC & ELECTRO-PNEUMATIC POSITIONERS

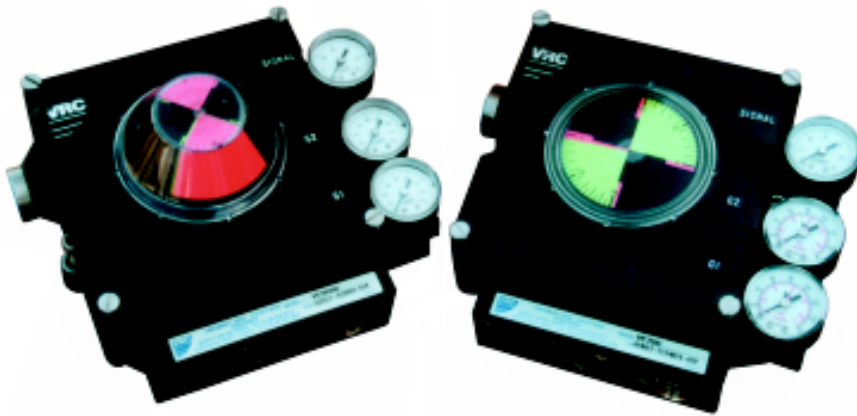

3-15 PSI OR 4-20mA
POSITIONERS FOR PNEUMATIC
ACTUATORS

TRUE MODULARITY FOR EASY
FIELD UPGRADES

UNIVERSAL MOUNTING

STANDARD FEATURES

NEMA 4X ENCLOSURE:

corrosion resistant composite housing

INDICATION:

flat top lens or high visibility dome

SPOOL VALVE:

10 SCFM@80PSI standard flow

15 SCFM@80PSI high flow

GAUGES:

set of 3 gauges

1 0-30 PSI, 2 0-160PSI

UNIVERSAL MOUNTING:

mounting bracket, coupler and piping

SPOOL VALVE:

10 SCFM@80PSI standard flow

15 SCFM@80PSI high flow

EASY CALIBRATION:

Simple zero/span adjustment with

minimal interaction

OPTIONAL EQUIPMENT

LIMIT SWITCHES:

Mechanical or Proximity Type

Easy set cams

POSITION TRANSMITTER:

for 4-20mA feedback


loop powered

INTRINSICALLY SAFE:

for hazardous locations

PERFORMANCE SPECIFICATIONS

RESOLUTION:	0.25% MAX 0.10% TYPICAL	GAIN :	250 SPRING RETURN 500 DOUBLE ACTING @ 80PSI
REPEATABILITY:	99.75% MIN 99.90% TYPICAL	AIR CONSUMPTION:	0.25 SCFM (STD) 0.45 SCFM (MAX) @80 PSI
HYSTERESIS:	0.50% MAX 0.25% TYPICAL	TEMP. RANGE:	-40°F TO +150°F -40°C TO +65°C
LINERITY:	1.00% MAX	ENCLOSURE:	NEMA 4/4X

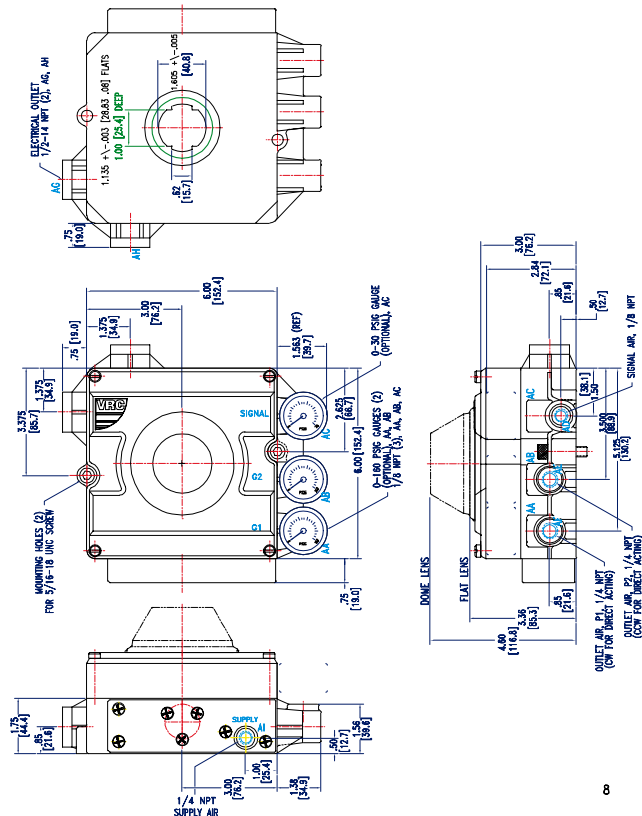

PNEUMATIC & ELECTRO-PNEUMATIC POSITIONERS

